



DANGER: LIVE PARTS ENCLOSED. Ensure the unit is installed by a qualified competent person in accordance with all relevant legislation and regulations including building regulations and wiring regulations BS7671. If in doubt contact a qualified competent person.



IMPORTANT INFORMATION

Follow the instructions below before working on or inside the equipment.



- Turn off all power supplies
- Always use a calibrated volt-sensing device to confirm the power is off.
- Replace all devices, doors and covers before turning on the power to this equipment.
- To avoid ingress of swarf and similar material, always remove gland plates to allow cutting/slotting for cable entries.
- Do not use power screwdrivers on electrical connections.



Failure to follow these instructions could result in serious injury or death.

Note: - It is good engineering practice to apply generous derating factors or make provision for free air between devices. In these situations, and in common with other manufacturers, we recommend a 60 % diversity factor is applied to the outgoing device's nominal rated current where it is intended to load the outgoing device continuously (in excess of 1 hour).

Installation of Incoming Devices

The choice of upstream protection for the incoming switch-disconnector is determined by the prospective fault level (PFL), at the point of installation.

Incomer	PFL up to 10 kA	PFL 10 to 16 kA	PFL 10 to 16 kA
125SW3, 125SW4	125 A backup fuses	100 A backup fuses	DO NOT USE

Important – the terminal screws of all incoming devices should be fully slackened before fitting.

Outgoing Devices

The maximum rating of the outgoing devices to be installed in this distribution board is 63 A

DIN Mounted 3 Pole Switch Disconnector 125SW3 & Direct Connection

- Ensure supply is switched off.
- Push the incomer up to the base of the busbar molding.
- Make sure that the DIN clips locate on the half DIN rail on the base plate.
- Press and hold the incomer in place while tightening the connections to the busbar stubs.
- Connections should be tightened to a torque as recommended for device been fitted.

DIN Mounted 4 Pole Switch Disconnector 125SW4 or RCD

- Ensure supply is switched off.
- Fix the DIN rail to the lower position using the fixing screws provided.
- Fix the Switch or RCD on to the DIN rail.
- Remove neutral link and box lug terminal from terminal bar and pan assembly.
- Use the 4-pole mounting kit (18LK125) to make connections from the Switch or RCD to the busbar and neutral bar.
- Connections should be tightened to the torque as recommended for device being fitted
- For more information refer to the Product Catalogue

Outgoing way numbering

The outgoing ways must be identified. If the busbar assembly is not pre-numbered, then the installer must number the outgoing ways.

Odd numbered ways on the left of the board way 1 being either at the top or bottom of the busbar assembly. Even numbered ways on the right of the board ascending in the same direction as the odd numbers. Way 1 must be opposite way 2, both either at the top or the bottom of the busbar assembly.

Note: - Neutral and Earth blank outgoing labels are provided.

Installation of RCBOs

- Ensure supply is switched off.
- Only Crabtree RCBOs can be used in Crabtree Distribution Boards:
 - 6HSR**/30B, 6HSR**/30C
 - 6HSR**/30C / LT
- Fully slacken all RCBO busbar terminal screws.
- Push RCBO onto appropriate busbar outgoing way making sure that the DIN clip faces towards the busbar assembly.
- Fully tighten busbar connections to a recommended torque of device
- Connect RCBO Neutral lead to appropriate numbered terminal on the neutral terminal bar.
- Ensure both live and neutral outgoing cables are terminated on the RCBO outgoing terminals.
- Connect the functional earth lead to appropriate terminal on earth terminal bar.



Installation of MCBs

- Ensure supply is switched off.
- Only Crabtree MCBs can be used in Crabtree Distribution Boards:
 - 6HSL••B, 6HSL••C and 6HSL••D (NEW)
 - 6HS••B, 6HS••C and 6HS••D
 - 6HTL••B, 6HTL••C and 6HTL••D (NEW)
 - 6HT••B, 6HT••C and 6HT••D
- Fully slacken all MCB terminal screws.

- Caution: The combined maximum load on two facing MCBs on a common cross link (e.g. Way 1 + Way 2) must not exceed 100 A.
- Push MCB onto appropriate busbar outgoing way – In 3 phase boards make sure that the DIN clip faces towards the busbar assembly in the center of the board
- Fully tighten busbar connections to recommended torque marked on MCB

Technical Data	
Standards Compliance	IEC/BS EN 61439-3
Rated Voltage	230/400 V AC, 3PH, 50 Hz
Rated operational current	125 A
Maximum outgoing rating of the MCB	63 A
Short Circuit Withstand Rating:	10 kA for 0.1 s
Mounting	Wall
Operating / Storage temperature <small>This is an average of 24 h maximum</small>	-5 to +40 °C
Pollution degree <small>Environmental conditions for which the panel is intended</small>	2 Minimum
Humidity <small>At maximum temperature (+40 °C)</small>	50 %
Entry	Bottom
Access	Top / Bottom
Degree of Protection	IP2XC (door closed)
Paint Finish	Light Grey RAL7035
For more Information contact Technical support Tel: +44 (0) 1543 438310 Email: crabtree.technical@electrium.co.uk	

Device	Max. Cable Capacity	Recommended Tightening Torque
Main Switch/ RCD	50 mm ²	2.3 Nm
MCB	25 mm ² / 35 mm ²	2.3 Nm
RCBO	16 mm ²	2.0 Nm
Earth & Neutral Terminals	25 mm ²	2.3 Nm
Earth & Neutral main termination point	50 mm ²	2.5 Nm
Removable Neutral link for isolation / test purpose	N/A	2.3 Nm

Table 3 - Dimensions for the main unit

Main Units	Description	Dimensions (mm)			Distance from gland plate to incoming terminals (mm)
		H	W	D	A
18LS04L	4-Way 125A Surface 3P+N Distribution Board	488	430	146	218
18LS06L	6-Way 125A Surface 3P+N Distribution Board	569	430	146	245
18LS08L	8-Way 125A Surface 3P+N Distribution Board	650	430	146	272
18LS12L	12-Way 125A Surface 3P+N Distribution Board	812	430	146	326
18LS16L	16-Way 125A Surface 3P+N Distribution Board	893	430	146	299
18LS20L	20-Way 125A Surface 3P+N Distribution Board	999	430	146	297
18LS24L	24-Way 125A Surface 3P+N Distribution Board	1136	430	146	297
Blanks					
18BP1/6	Blanking Strip – 6 x (1 mod)				-
18BP1/12	Blanking Strip – 12 x (1 mod)				-
18BP3/4	Blanking Strip – 4 x (3 mod)				-
18BP12/2	Blanking Strip – 2 x (12 mod)				-
18MBP1L	SP MCB SIZE BLANK (5SL)				-
18BB1L	YELLOW INSULATORS (1 PACK 5 PIECES)				-

For full product range, see Product catalogue at: <https://www.electrium.co.uk/about/our-brands/crabtree>




Electrium Sales Limited, Walkmill Lane, Cannock, WS11 0XE
Tel: 01543 455000 Fax: 01543 455001



Waste electrical products should not be disposed of with household waste.
Please recycle where waste disposal facilities exist.
Check with your retailer, wholesaler or local authority for recycling advice.



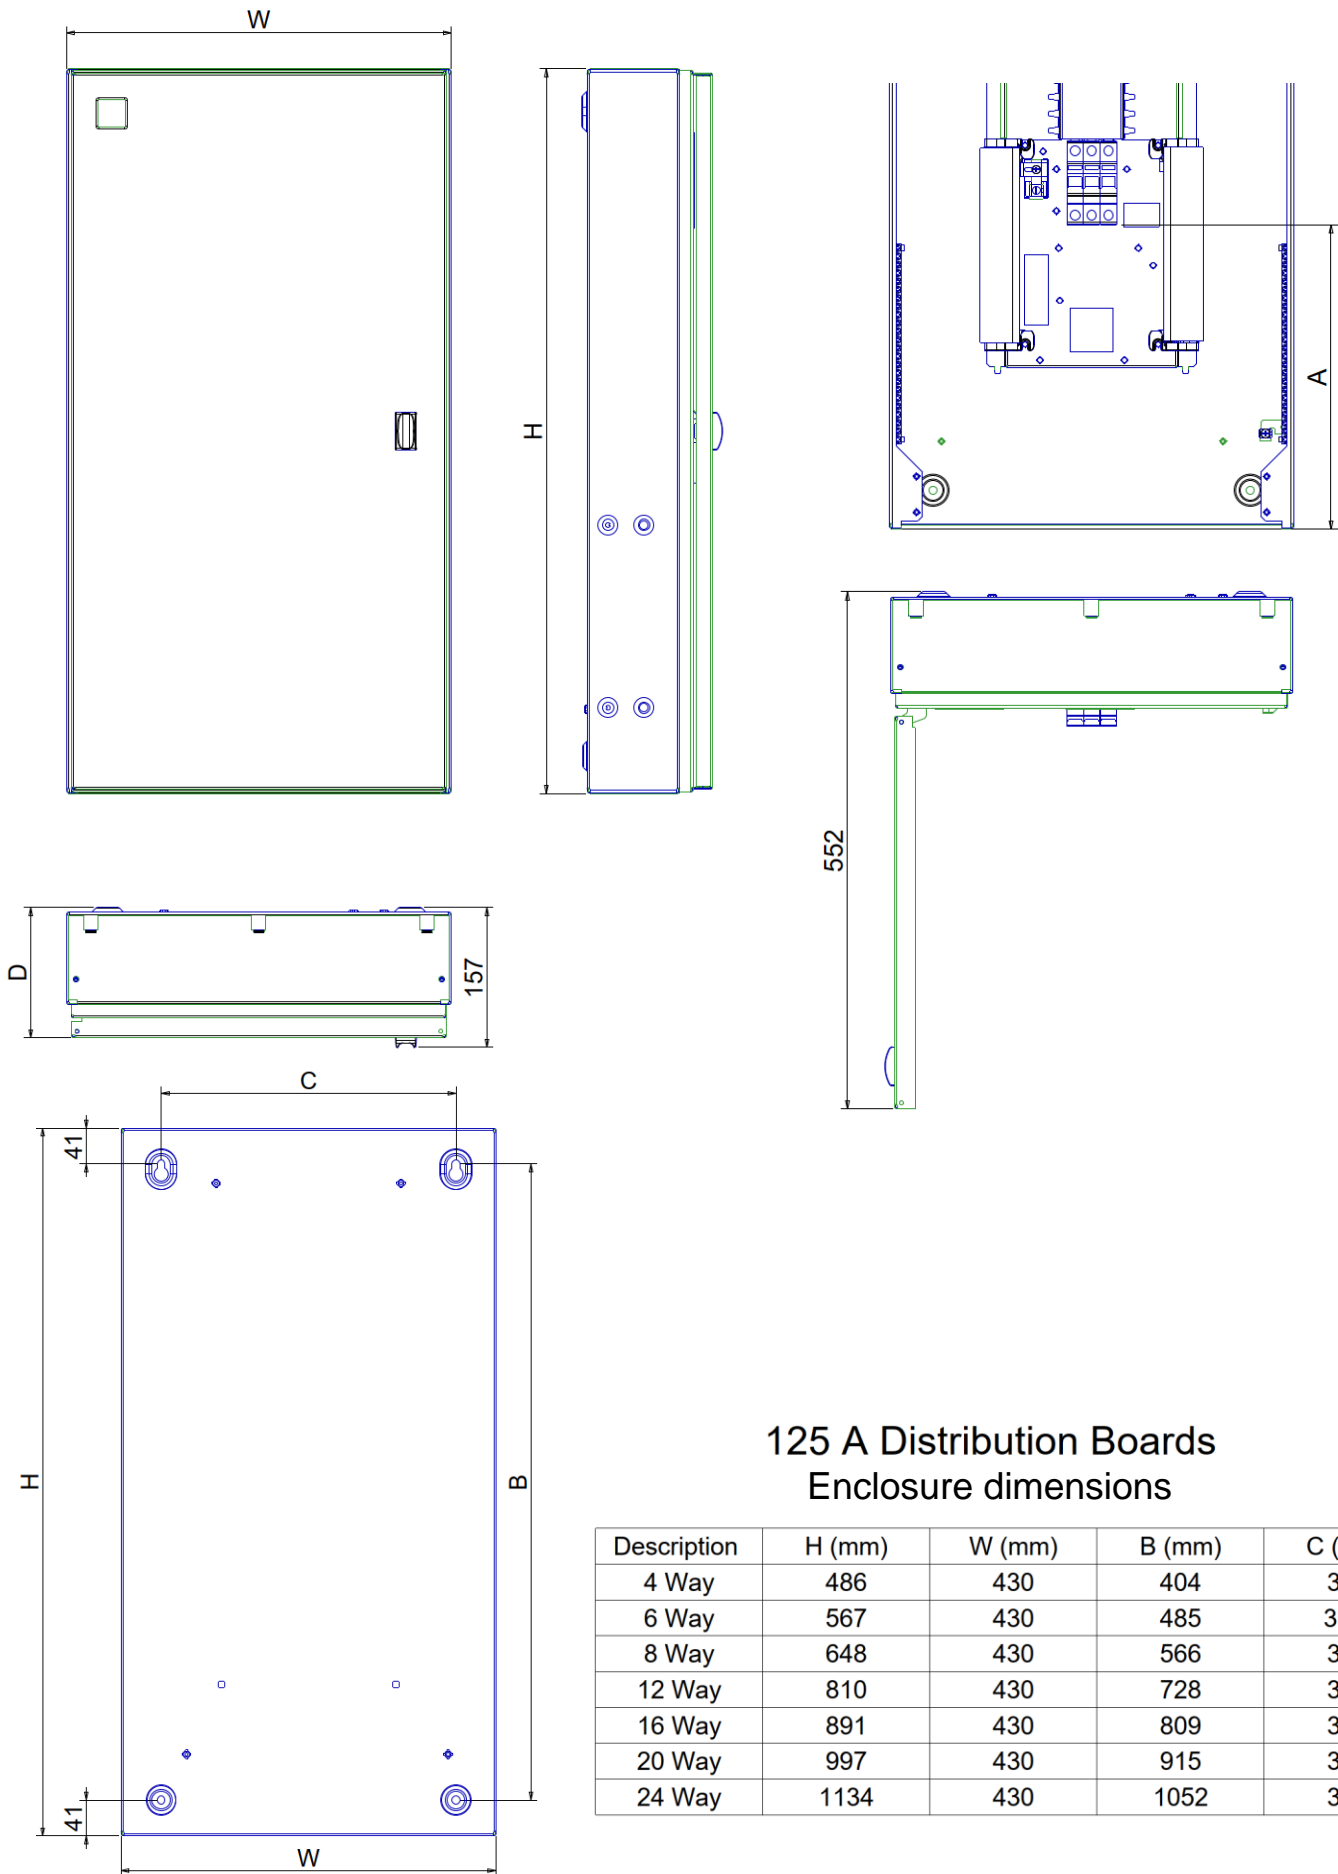

125 A Distribution Boards Enclosure dimensions

Description	H (mm)	W (mm)	B (mm)	C (mm)
4 Way	486	430	404	338
6 Way	567	430	485	338
8 Way	648	430	566	338
12 Way	810	430	728	338
16 Way	891	430	809	338
20 Way	997	430	915	338
24 Way	1134	430	1052	338



Electrium Sales Limited, Walkmill Lane, Cannock, WS11 0XE
Tel: 01543 455000 Fax: 01543 455001



Waste electrical products should not be disposed of with household waste.
Please recycle where waste disposal facilities exist.
Check with your retailer, wholesaler or local authority for recycling advice.

