


	230 V 50/60 Hz
	16 A / 250 V~ $\mu \cos \varphi = 1$
<b>P</b>	0,9 W
Programs	28
	$\pm 1$ s / day
	1 ... 4 mm <sup>2</sup> 0,5 ... 2,5 mm <sup>2</sup> 8 mm
	3 V
	- 20 °C ... +55 °C
	- 20 °C ... +60 °C

4000 W	2500 VA	
1800 W	1800 W	
60 W 7 $\mu$ F	1200 W	
2300 W	60 VA	
200 W		max. 250 V AC

**⚠ Safety notes**


This product may be installed only by a qualified electrician. Incorrect installation and/or incorrect use may result in a fire hazard or electric shocks. Before installation, read the operating instructions and observe the productspecific requirements for the installation location. Use only original spare parts for repair and maintenance. All products may be opened and repaired only by specially trained personnel. Unauthorised opening and repair by other persons will invalidate all claims for liability, replacement or warranty services. The device contains a Li cell type battery (LiMnO<sub>2</sub>) CR2032. When the product reaches the end of its life, this cell must be correctly removed and disposed of in accordance with national legislation and the requirements of environmental protection.

**① SET TIME/DATE**

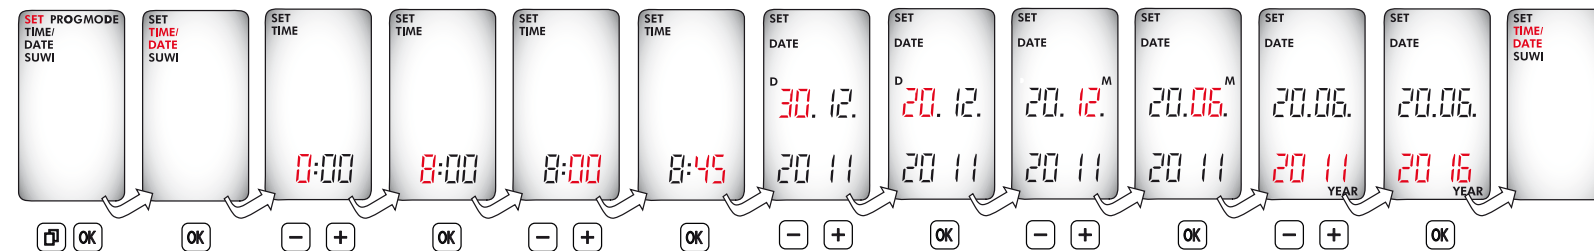

**Operating principle:**  
 Typ 1.B. S. T.  
 IEC/EN 60730-1,  
 IEC/EN 60730-2-7  
 Montage: in distribution panel,  
 Degree of contamination: 2  
 Switch output, potential-free  
 Rated impulse voltage: 4 kV


**Reset**

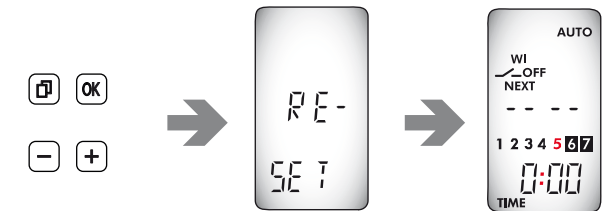

**Note!**


A reset clears the entire memory, which means that all previously set data will be lost. Press and hold all four keys together for about 2 seconds, then release them. The time, date, summertime/wintertime and switching times will have to be re-entered.

**② SET Summer Winter-time**

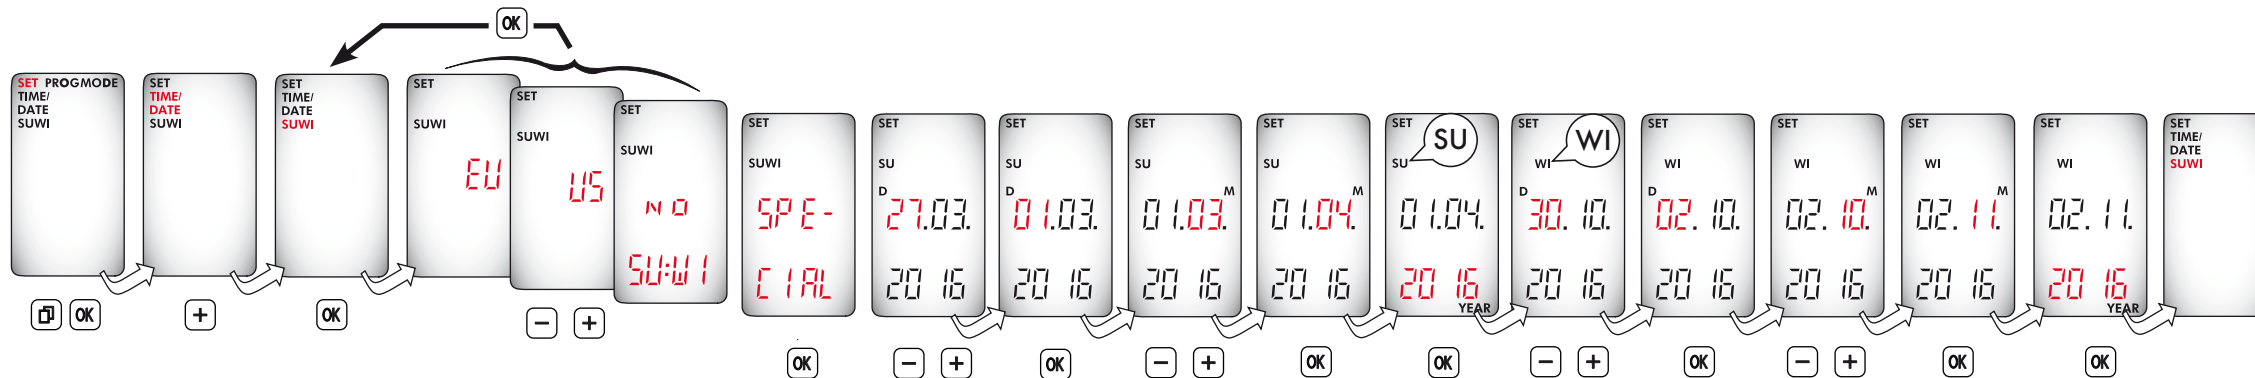


**③ Prog NEW**

**Programming**  
 One program = switch-on time + switch-off time + switch-on and switch-off days  
 Programs with predefined switch-on / switch-off days  
 • DAY 1-7 (MO-SU) • DAY 1-5 (MO-FR) • DAY 6-7 (SA and SU)  
 Programs for each channel are interlinked with OR logic.

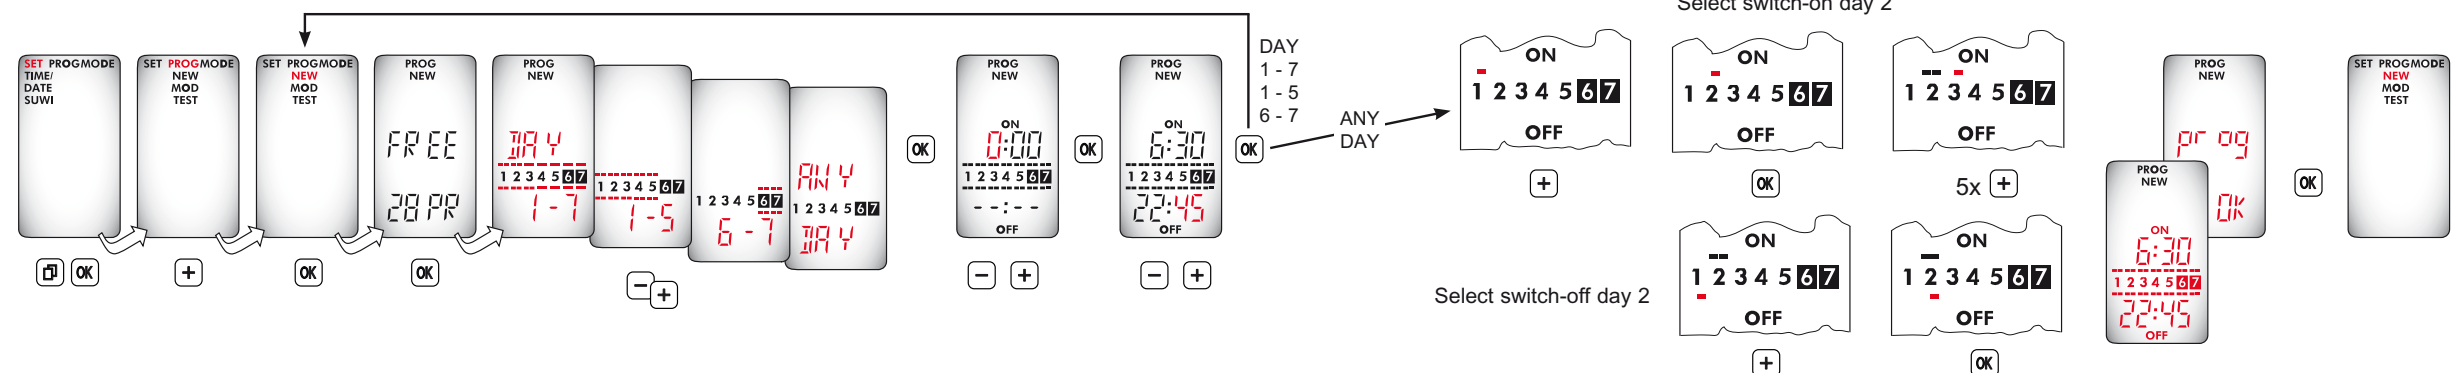

4

Prog MODIFY

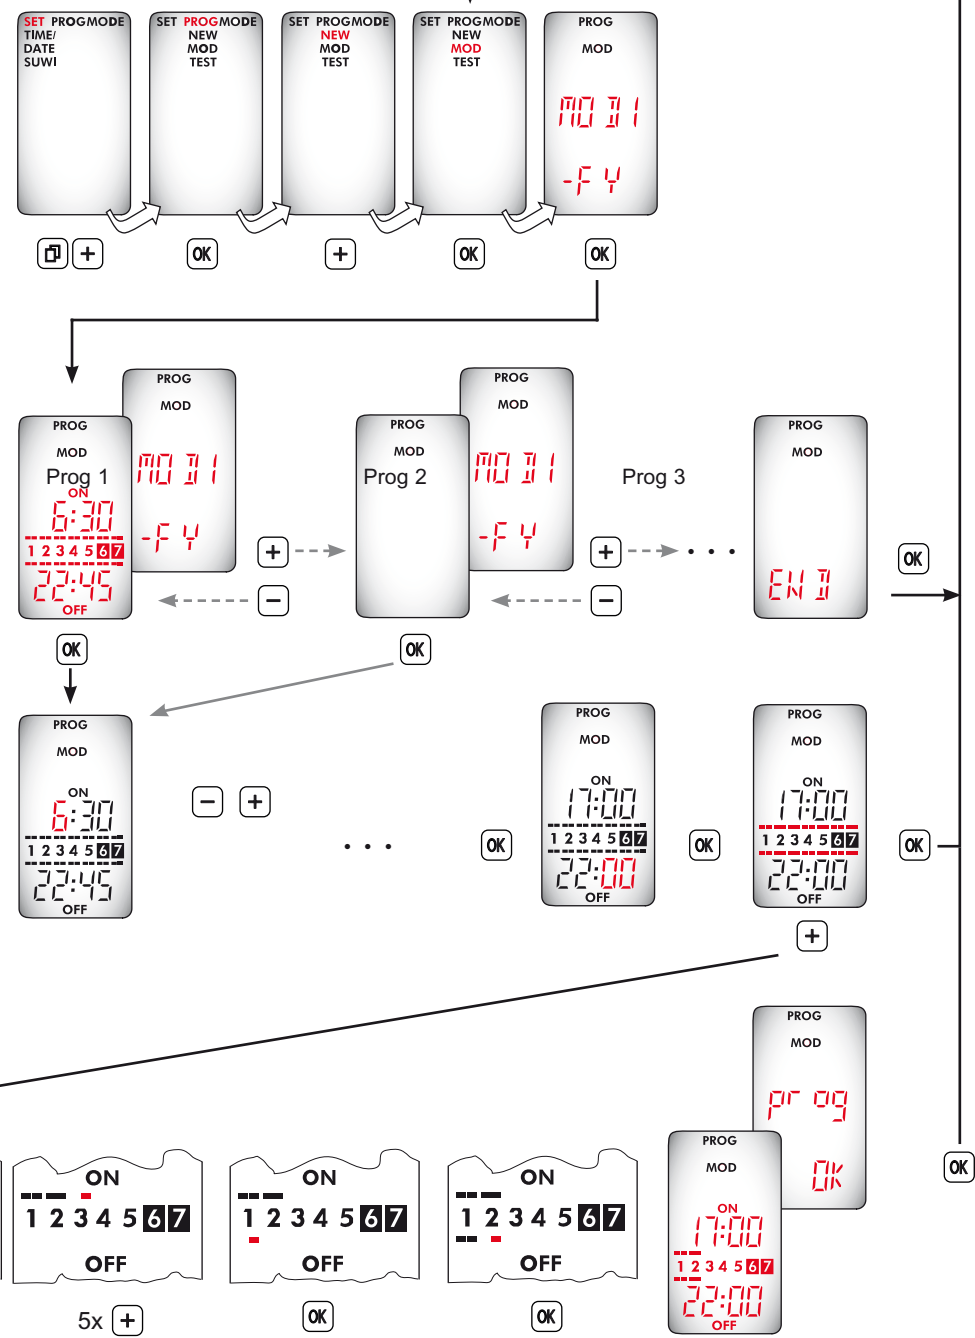


5

Prog TEST

prog -> Programs in the order entered



SERIAL -> Switching commands in chronological order

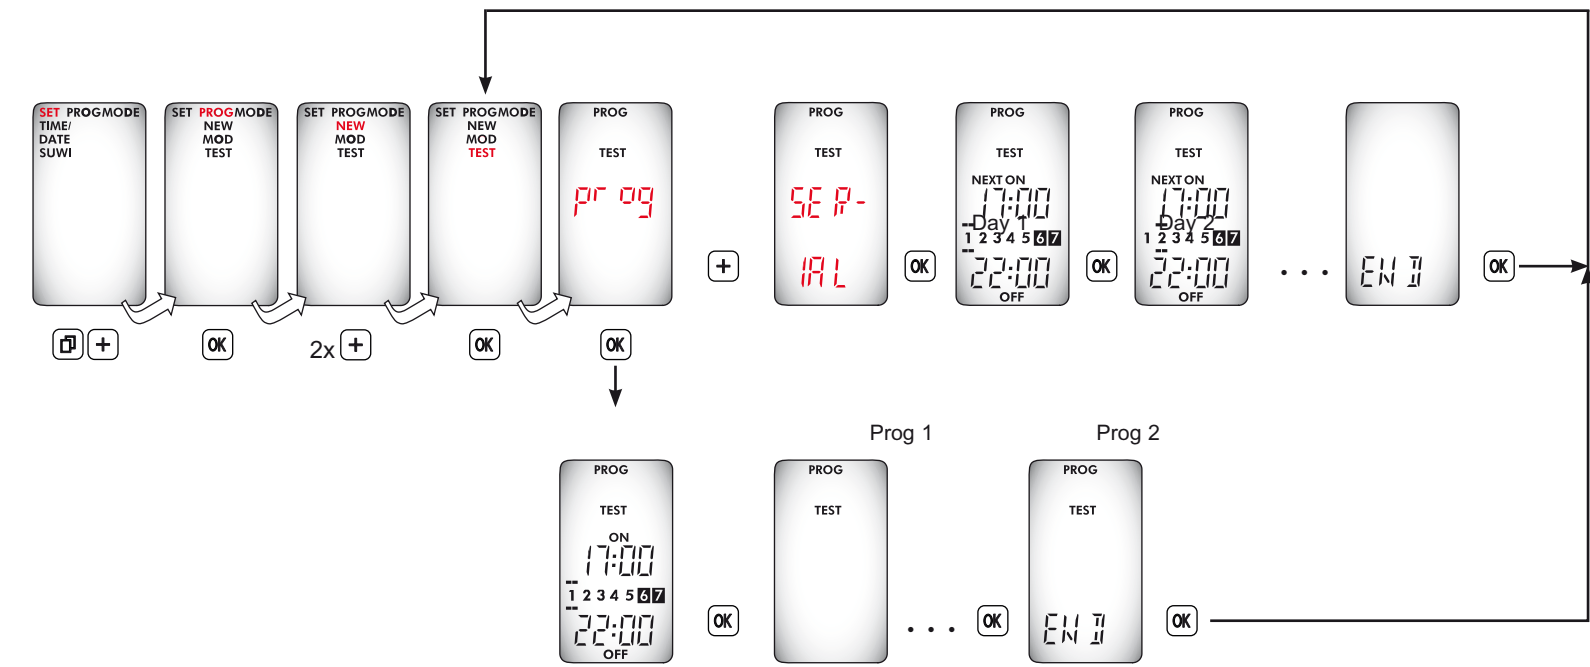

6


MODE PERManent

Continuous switching On/Off

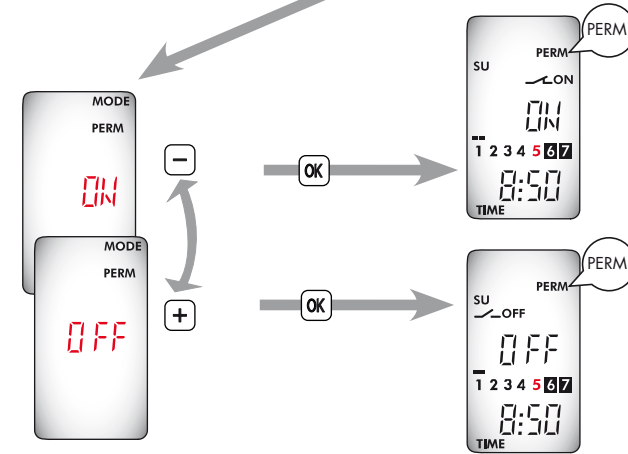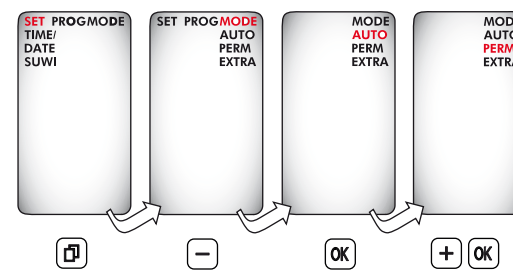

7

Mode EXTRA

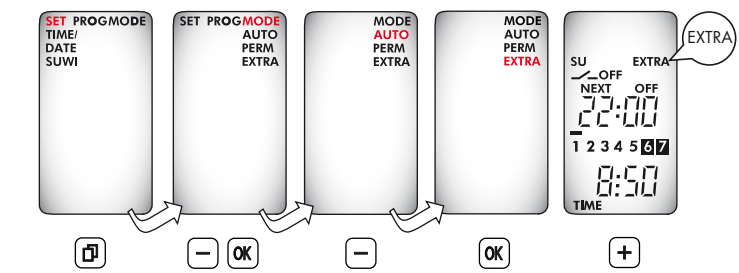


State of contact set by program will be reversed. The next program automatically returns the switch to ON or OFF as programmed.

4A

Prog MODIFY

DEL ONE -> Delete a single program,

DEL ALL -> Delete all programs

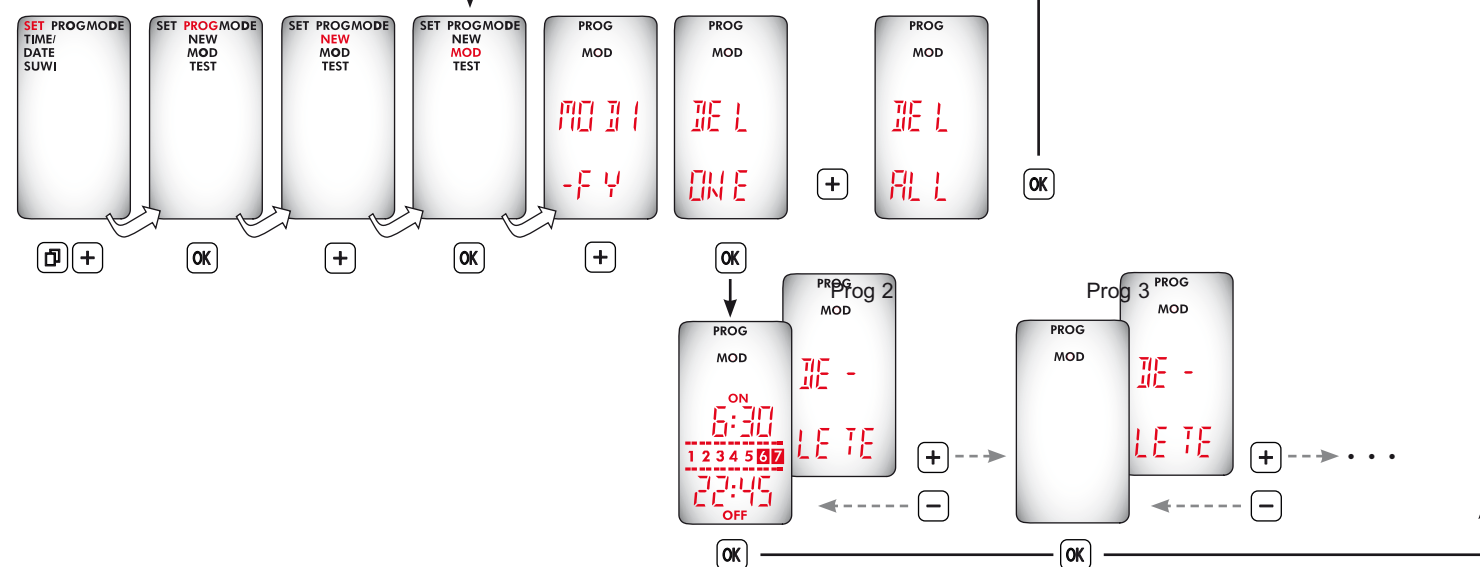

Switch off the device before dismantling the module. Do not switch on again until the module has been installed. Always use a Li cell type battery (LiMnO<sub>2</sub>) CR2032, 3 V. High temperature type min +70 °C. The device contains a Li cell type battery (LiMnO<sub>2</sub>) CR2032. When the product reaches the end of its life, this cell must be correctly removed and disposed of in accordance with national legislation and the requirements of environmental protection.

