



Installation Instructions 250A Direct Connection Kit NH250LDCK



DANGER: LIVE PARTS ENCLOSED. Ensure the unit is installed by a qualified competent person in accordance with all relevant legislation and regulations including building regulations and wiring regulations BS7671. If in doubt contact a qualified competent person.



IMPORTANT INFORMATION

Follow the instructions below before working on or inside the equipment.



- Turn off all power supplies
- Always use a calibrated volt-sensing device to confirm the power is off.
- Replace all devices, doors and covers before turning on the power to this equipment.
- To avoid ingress of swarf and similar material, always remove gland plates to allow cutting/slotting for cable entries.
- Do not use power screwdrivers on electrical connections.



Failure to follow these instructions could result in serious injury or death.

- 1) Remove shrouds and loosen slotted terminal screws x3 and offer assembly to busbar end connections. Please note direct connections are designed to fit under busbar end connection.
- 2) Fix the direct connection assembly to the back plate with screws provided.
- 3) Fully tighten terminal screws to secure to busbar (See table below for torque value).
- 4) Connect incoming cables to the large terminal cages at the lower end of assembly and tighten to the recommended torque as shown in the table below.
- 5) Fit the large top terminal shroud – ensure that phase barriers are correctly located between the terminal cages at the main Busbar connection and fix the shield with the screws.
- 6) Remove left hand neutral terminal cover, raise the 2 screws adjacent to the movable neutral link. Loosen link screw and slide to engage with 2 terminal screws, tighten screws (See table below for torque value) & replace neutral bar shroud.
- 7) Fit main incoming neutral cable to terminal and replace neutral terminal shroud

Note

- Before fitting all shields and the front cover, check the tightness of **all** connections, including factory made connections.
- **DO NOT USE POWER TOOL SCREWDRIVERS ON ELECTRICAL CONNECTIONS**

TERMINAL	Max Cable Capacity	TORQUE Nm
TERMINAL CAGE SCREWS	N/A	6Nm
TERMINAL CAGE GRUB SCREW	120mm ²	12Nm
Neutral Bar Screws	25mm ²	2.3Nm

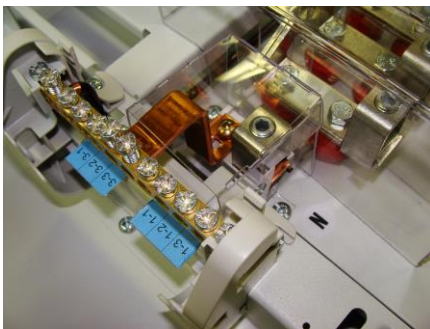


Fig. 2

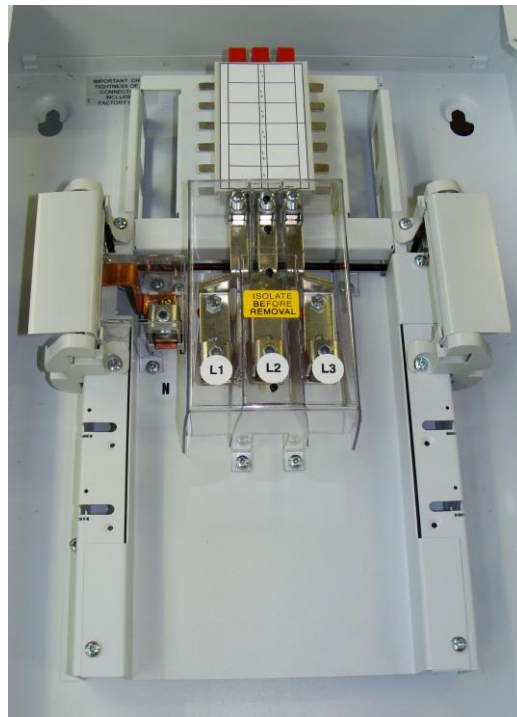


Fig 1



Electrium Sales Limited, Walkmill Lane, Cannock, WS11 0XE
Tel: 01543 455000 Fax: 01543 455001



Waste electrical products should not be disposed of with household waste. Please recycle where waste disposal facilities exist. Check with your retailer, wholesaler or local authority for recycling advice.

