


List No. 4314/USBC/PB
RAISED DECORATIVE

13A 1 Gang Single Pole Switched Socket with Type A and Type C 20W USB Polished Brass

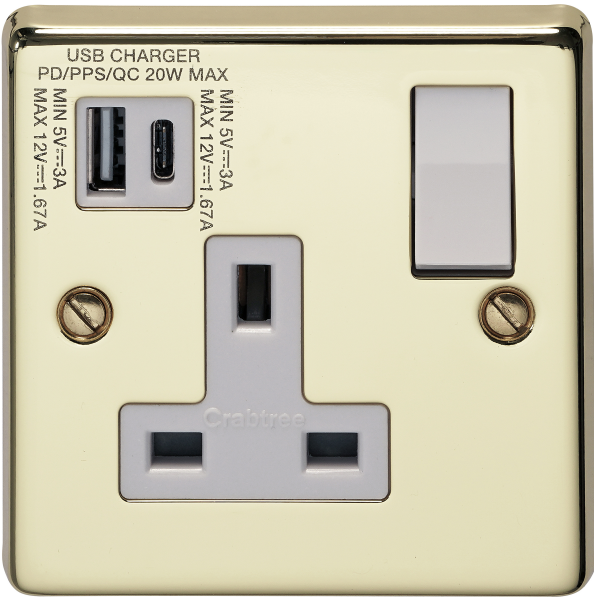

- Type A and Type C USB Connection
- Voltage Variation 5V to 12V
- Maximum 20 Watts
- Supports PD, PPS and QC Charging Protocols
- Polished Brass Finish

Product Specification Data		Revision Date: 11/10/2024
Product Standard/s	BS1363-2, BSEN 62368-1	
Terminal Capacity L&N	3 x 1.5, 3 x 2.5, 2 x 4.0 mm²	
Terminal Capacity E	3 x 1.5, 3 x 2.5, 2 x 4.0 mm²	
CE Conformity	Yes	
WEEE Symbol	Yes	
G Mark	Yes	
UKCA Conformity	Yes	
Operating voltage	250 V	
Frequency	50 Hz	
Max. output current	3250 mA	
Colour	Brass	
Min. depth of built-in installation box	25 mm	

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this datasheet, specifications and performance data are constantly changing. Latest details can be obtained from the Electrium website.