


- Curved Screwless Plate
- Dual USB Output Total 4.2A (2 x 2.1A)
- Silver Finish

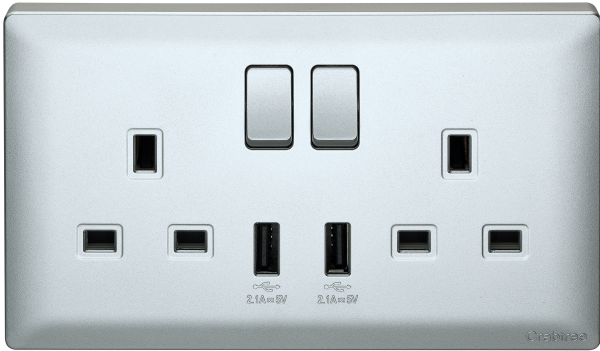

| Product Specification Data | | Revision Date: 11/10/2024 |
|-----------------------------------------|-------------------------------------------|---------------------------|
| Product Standard/s | BS 1363 | |
| Terminal Capacity L&N | 3 x 1.5, 3 x 2.5, 2 x 4.0 mm ² | |
| Terminal Capacity E | 3 x 1.5, 3 x 2.5, 2 x 4.0 mm ² | |
| LRV Value | 24 | |
| CE Conformity | Yes | |
| WEEE Symbol | Yes | |
| G Mark | Yes | |
| UKCA Conformity | Yes | |
| Operating voltage | 250 V | |
| Frequency | 50 Hz | |
| Max. output current | 2100 mA | |
| Mounting method | Flush-mounted | |
| Colour | Silver | |
| Min. depth of built-in installation box | 35 mm | |

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this datasheet, specifications and performance data are constantly changing. Latest details can be obtained from the Electrium website.