




List No. NH250LDCK

WYLEX

250A 3P Direct Connection Kit

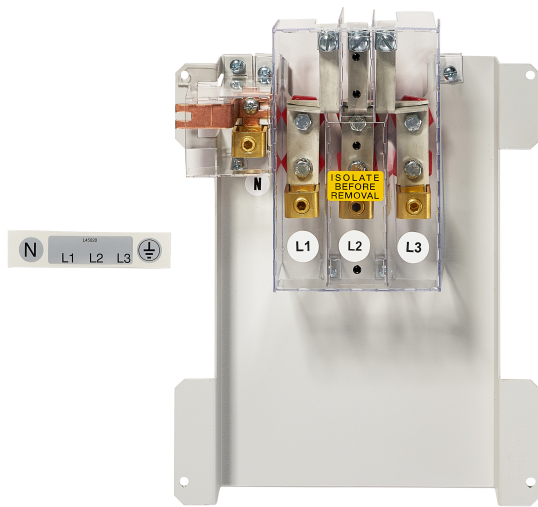

- For use in NH Distribution Boards
- Supplied with mounting kits, links, and fixing screws

Product Specification Data

Revision Date: 13/06/2022

Max. rated operation voltage Ue AC	415 V
Rated operating voltage	415 V
Rated permanent current Iu	250 A
Number of poles	3
Suitable for distribution board installation	Yes
Product Standard/s	BS EN 61439-3
Terminal Capacity L&N	120 mm ²
Frequency	50 Hz
CE Conformity	Yes
WEEE Symbol	Yes
UKCA Conformity	Yes
Amperage	250 A
Pole Configuration	3P
Operating Voltage	415 V
Type of Current	AC

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this datasheet, specifications and performance data are constantly changing. Latest details can be obtained from the Electrium website.

electrium

Electrium Sales Limited, Walkmill Lane, Cannock WS11 0XE
01543 455000 www.electrium.co.uk info@electrium.co.uk