




## List No. NH250LTPMB

WYLEX

250A TP MCCB Incomer

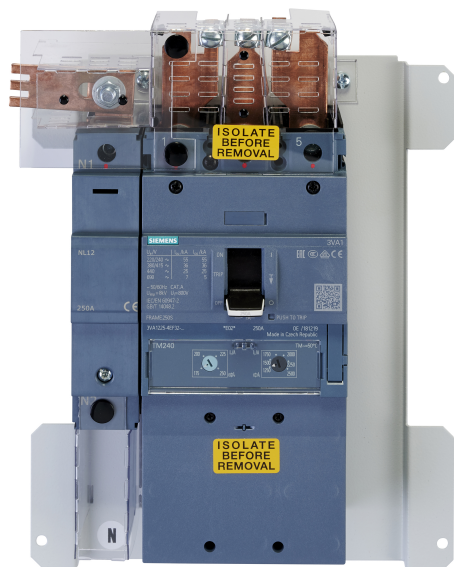

- For use in NH Distribution Boards
- Supplied with mounting kits, links, and fixing screws

### Product Specification Data

Revision Date: 17/02/2022

Version as main switch	Yes
Number of switches	1
Max. rated operation voltage Ue AC	415 V
Rated operating voltage	415 V
Rated permanent current Iu	250 A
Number of poles	3
Suitable for distribution board installation	Yes
Degree of protection (IP), front side	IP3X
Product Standard/s	BS EN 60947-2
Terminal Capacity L&N	120 mm <sup>2</sup>
Frequency	50 Hz
CE Conformity	Yes
WEEE Symbol	Yes
UKCA Conformity	Yes
Amperage	250 A
Pole Configuration	3P
Operating Voltage	415 V
Type of Current	AC

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this datasheet, specifications and performance data are constantly changing. Latest details can be obtained from the Electrium website.



Electrium Sales Limited, Walkmill Lane, Cannock WS11 0XE  
01543 455000 [www.electrium.co.uk](http://www.electrium.co.uk) [info@electrium.co.uk](mailto:info@electrium.co.uk)