




List No. NHESPDKIT2

NH DISTRIBUTION

Wylex enclosed SPD kit Type 2 with 10kA MCB

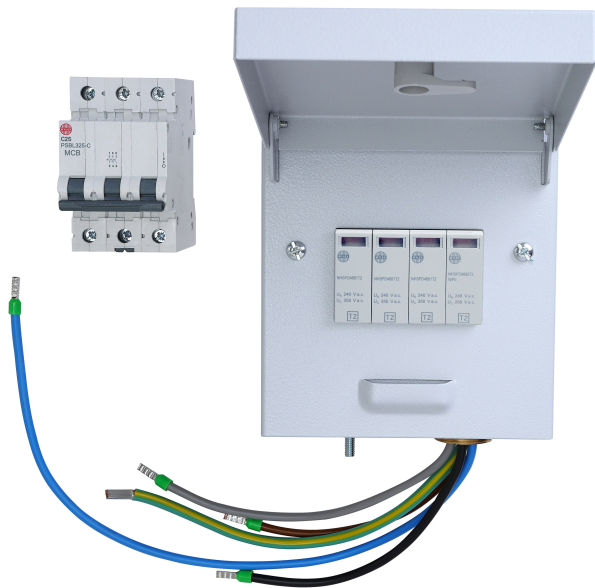

- Accessory for NH Distribution Boards
- Supplied with Type 2 SPD, 10kA MCB (for SPD protection), cable loom kit & enclosure for mounting to the side of the distribution board
- Can be mounted on either the left hand side or the right hand side of the distribution board
- Nominal Voltage (AC) 240/415

Product Specification Data

Revision Date: 21/06/2024

System configuration DC	No
System configuration IT	No
System configuration TN	No
System configuration TN-C	No
System configuration TN-C-S	Yes
System configuration TN-S	Yes
System configuration TT	Yes
System configuration other	No
Number of conductors (without earthing)	4
Nominal discharge surge current (8/20)	20 kA
Max. continuous voltage AC	350 V
Max. discharge surge current (8/20)	40 kA
Mounting method	Surface mounted
Max. conductor cross section solid (solid, stranded)	35 mm ²
Max. conductor cross section flexible (fine-strand)	25 mm ²
Voltage protection level L-N	1.4 kV
Voltage protection level N-PE	1.5 kV
With remote signalling contact	Yes
Signalling at the device	Optical
Category type 2	Yes
Product Standard/s	BS EN 61643-11
Terminal Capacity L&N	25 mm ²
Terminal Capacity E	25 mm ²
Frequency	50/60 Hz
CE Conformity	Yes
WEEE Symbol	Yes
UKCA Conformity	Yes
Colour RAL	7035
Height	142 mm

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this datasheet, specifications and performance data are constantly changing. Latest details can be obtained from the Electrium website.

Width	180 mm
Depth	124 mm

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this datasheet, specifications and performance data are constantly changing. Latest details can be obtained from the Electrium website.



Electrium Sales Limited, Walkmill Lane, Cannock WS11 0XE
01543 455000 www.electrium.co.uk info@electrium.co.uk