


List No. VX1500USBSG

METALCLAD

13A 2 Gang Double Pole Metalclad Switched Socket With
Dual 2.1A USB s

- 2.1A Dual Shared USB Output
- 5V USB Output

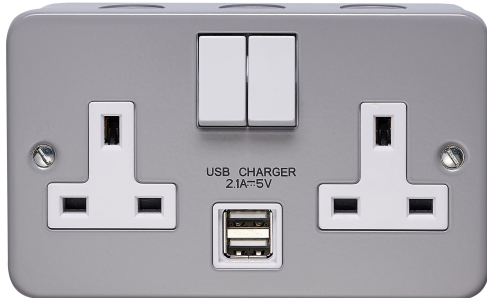

Product Specification Data		Revision Date: 15/10/2021
Product Standard/s	BS 1363-2	
Terminal Capacity L&N	3 x 1.5, 3 x 2.5, 2 x 4.0 mm ²	
Terminal Capacity E	3 x 1.5, 3 x 2.5, 2 x 4.0 mm ²	
LRV Value	34	
CE Conformity	Yes	
WEEE Symbol	Yes	
UKCA Conformity	Yes	
Operating voltage	250 V	
Frequency	50 Hz	
Max. output current	2100 mA	
Output voltage	5 V	
Mounting method	Surface mounted (plaster)	
Colour	Grey	
Min. depth of built-in installation box	35 mm	

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this datasheet, specifications and performance data are constantly changing. Latest details can be obtained from the Electrium website.