# List No. WRM100/2

**LIFELINE**

100A 100mA DP Type AC RCCB

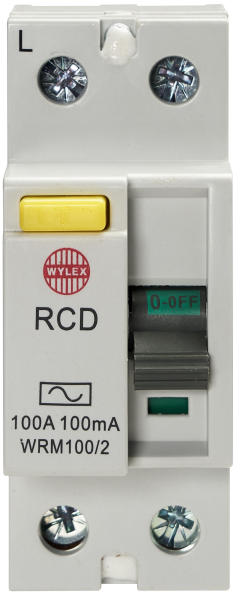


- Double pole RCCB
- 100A 100mA
- Type AC

| Product Specification Data | Revision Date: 11/12/2025 |
|---|---|
| Number of poles | 2 |
| Rated voltage | 230 V |
| Rated current | 100 A |
| Rated fault current | 0.1 A |
| Rated insulation voltage Ui | 400 V |
| Rated impulse withstand voltage Uimp | 4 kV |
| Mounting method | DIN rail |
| Leakage current type | AC |
| Selective protection | No |
| Frequency | 50 Hz |
| Additional equipment possible | No |
| With interlocking device | No |
| Degree of protection (IP) | IP20 |
| Width in number of modular spacings | 2 |
| Connectable conductor cross section multi-wired | 50 mm² |
| Product Standard/s | BS EN 61008 |
| CE Conformity | Yes |
| WEEE Symbol | Yes |
| UKCA Conformity | Yes |

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this datasheet, specifications and performance data are constantly changing. Latest details can be obtained from the Electrium website.

**Electrium Sales Limited,** Walkmill Way, Cannock WS11 0XE
01543 455000 www.electrium.co.uk info@electrium.co.uk