



IMPORTANT INFORMATION

This unit should be installed by a qualified competent person in accordance with all relevant legislation and regulations including building regulations and wiring regulations BS7671. If in doubt contact a qualified competent person.

- Turn off all power supplying this equipment before working on or inside the equipment.
- Always use a properly rated volt-sensing device to confirm the power is off.
- Replace all devices, doors and covers before turning on the power to this equipment.
- To avoid ingress of swarf and similar material, always remove gland plates to allow cutting/slotting for cable entries.

Failure to follow these instructions could result in serious injury or death.

DO NOT USE POWER TOOL SCREWDRIVERS ON ELECTRICAL CONNECTIONS



This product is suitable for indoor use only and is rated at IP2XC.

The consumer unit and associated components have been type tested to the following specifications: -

Consumer unit	BSEN61439-3
SPD	BSEN61643-12
Main switch	BSEN60947-3



1. Enclosure Mounting

Fix unit to wall using screws. Knockouts are provided for cable entry.

2. Route All Incoming & Outgoing Cables

Knockouts are provided at the top and bottom of the enclosure for cable entry

Incoming Supply

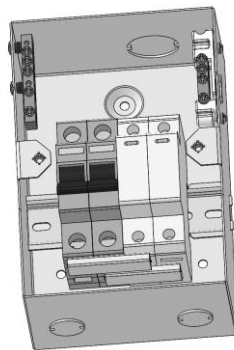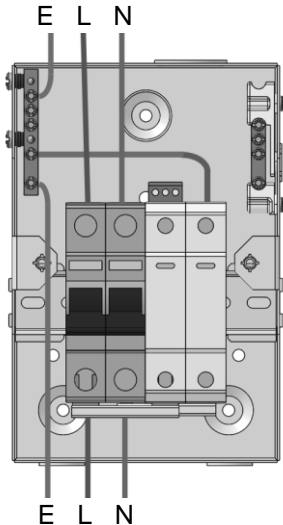

Important Note:
Incoming cables must only be fitted into the top of the switch as shown

Outgoing Supply



Electrium Sales Limited, Walkmill Lane, Cannock, WS11 0XE
Tel: 01543 455000 Fax: 01543 455001

3. Check the tightness of all screw connections, including factory made connections.

Terminal Capacities

Device	Max. Cable Capacity	Recommended tightening torque
Main Switch / RCD	50 mm ²	2.3 Nm
	1.5 mm ² to 16 mm ²	3.0 Nm
SPD	25 mm ² to 35 mm ²	4.5 Nm
	16 mm ²	1.7 Nm

Use No.2 Pozidrive bit.

4. Fit Cover

Fit cover using screws provided.

5. Testing Of The Installation

After completion it is essential that the installation is tested in accordance with the IET Wiring Regulations (BS7671). It is important that this includes verification that the earth loop impedance requirements are satisfied.

Before any testing the removable modules of both L-N & N-PE Surge Arresters must be removed. Once testing is complete the modules must be re-fitted.

6. Consumer Unit Accessories

Fire retardant CABLE MEMBRANE ENTRIES protect cables from damage and support compliance with the IP4X requirement BS7671 416.2.2.

CRCE1	Kit 1 3 x 32 mm & 7 x 20 mm
CRCE2	Kit 2 10 x 20 mm

In line with published IET formal recommendation MAINS TAILS GLANDS will protect mains tails at their point of entry into all metal consumer units. Furthermore disturbance of mains tails within the consumer unit, up to their point of connection to the isolator, is restricted.

MTCG32	Tails Gland Kit 32mm
--------	----------------------

INTUMESCENT STRIPS will dramatically subdue or fully extinguish any fire which may occur within a consumer unit. The addition of an intumescent strip within a correctly installed all metal consumer unit will support the requirement of BS7671 421.1.201 effectively containing and suppressing a fire at source.

CR0706FS	7 module
CR1009FS	10 module
CR1312FS	13 module
CR1615FS	16 module
CR2120FS	21 module



Waste electrical products should not be disposed of with household waste. Please recycle where waste disposal facilities exist. Check with your retailer, wholesaler or local authority for recycling advice.

