

Semi-Flush Lid Kits

In order to fit the semi-flush lid correctly see Fig1 below. Fig 2 shows a unit fully installed complete with a semi-flush lid

UK
CA


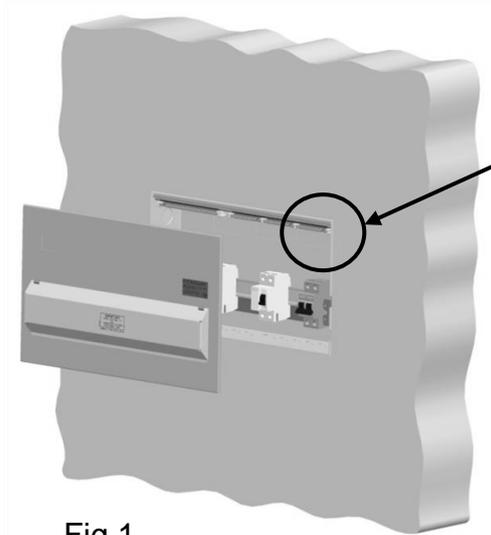


Fig 1

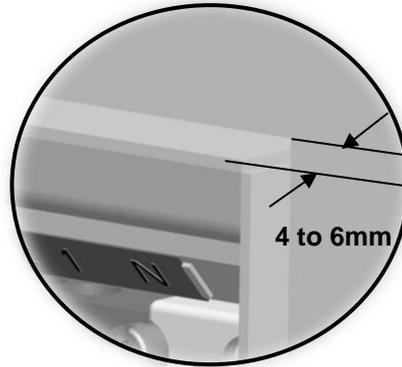

The box must be fitted to sit proud of the mounting surface

Minimum: 4mm
Maximum: 6mm

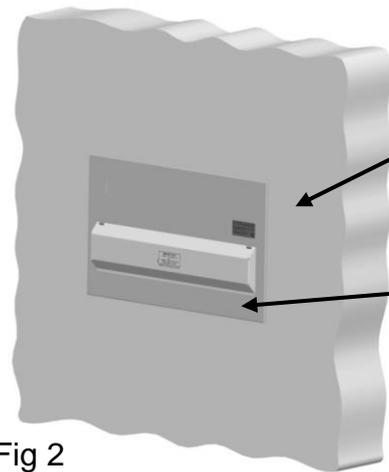


Fig 2

The consumer unit must be de-rated as follows: - Max. 100% rating, continuous load (in excess of 1 hour) 90% of incomer rating. The product number of the consumer unit on to which the kit is fitted must be recorded on the silver specification label affixed to the front cover.

